













Índice

Español.....2	Portugués.....20	English.....39
---------------	------------------	----------------

MANUAL DE USUARIO
CONTROL REMOTO
INFRARROJO WIFI

GADNIC
CONWIF01

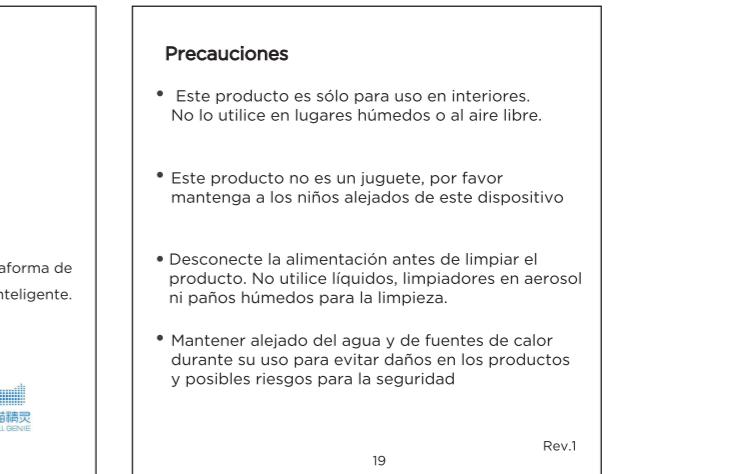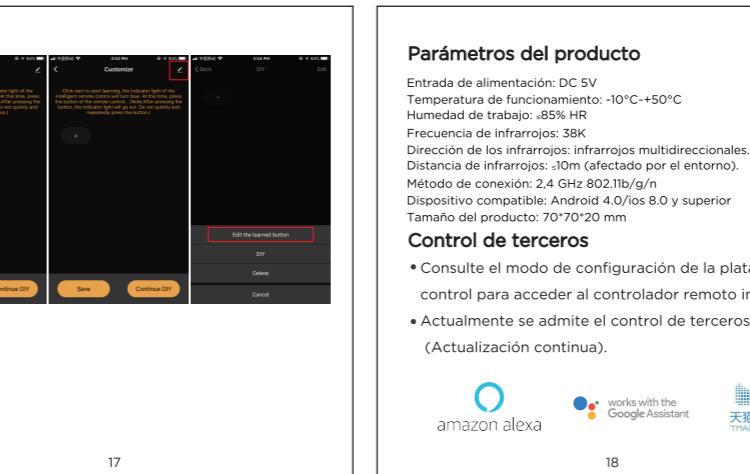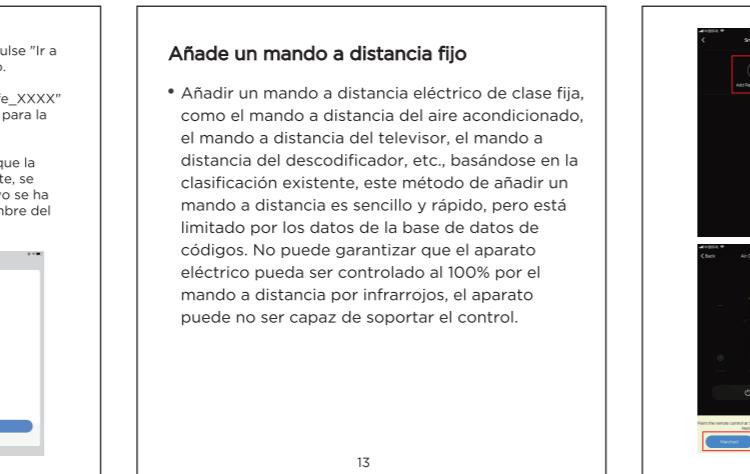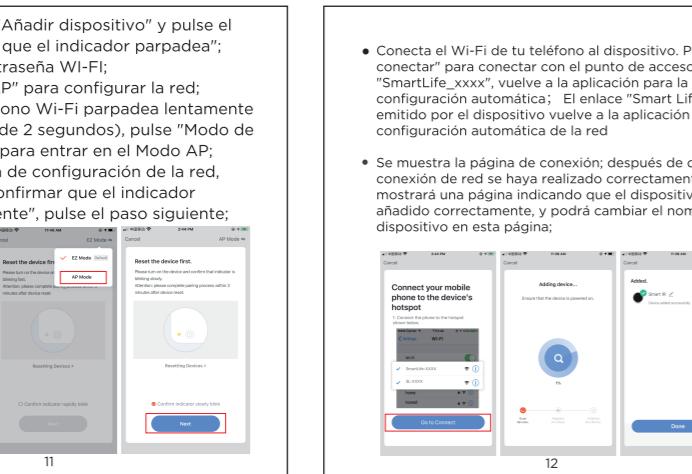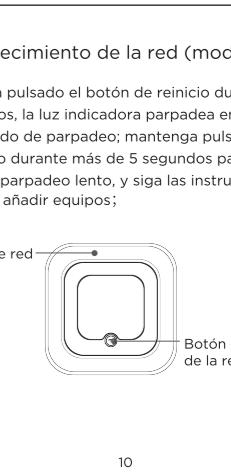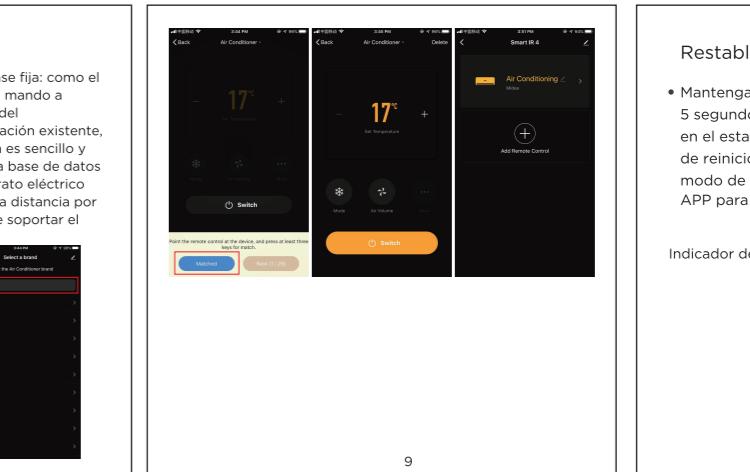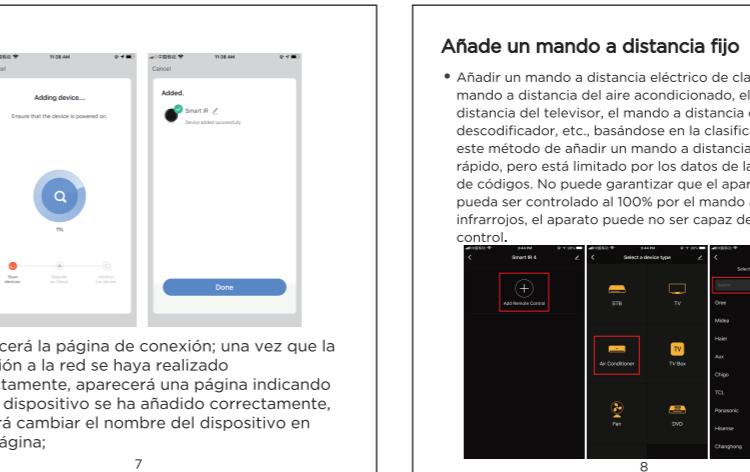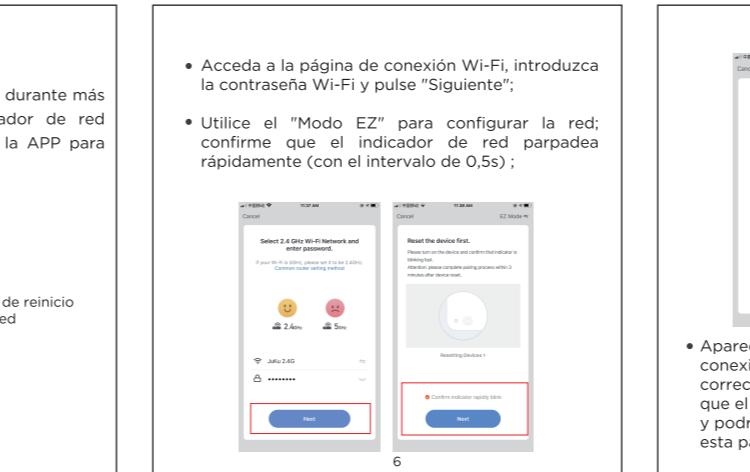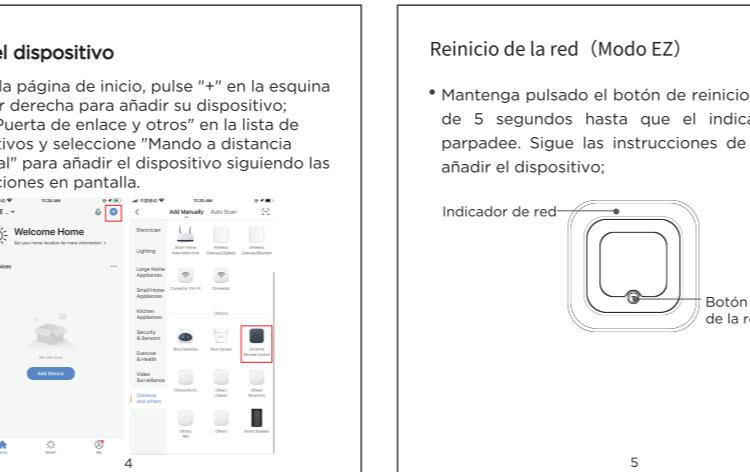

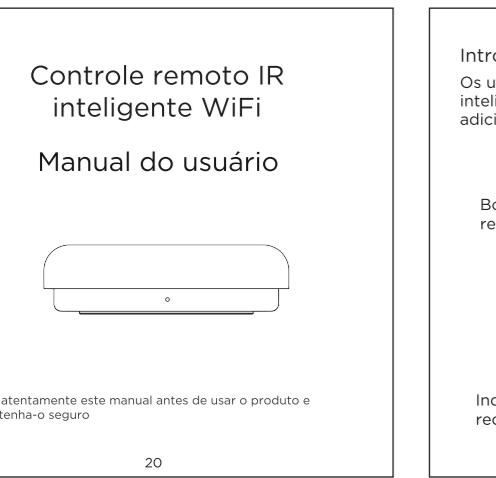


Controle remoto IR inteligente WiFi

Manual do usuário

Leia atentamente este manual antes de usar o produto e mantenha-o seguro

20

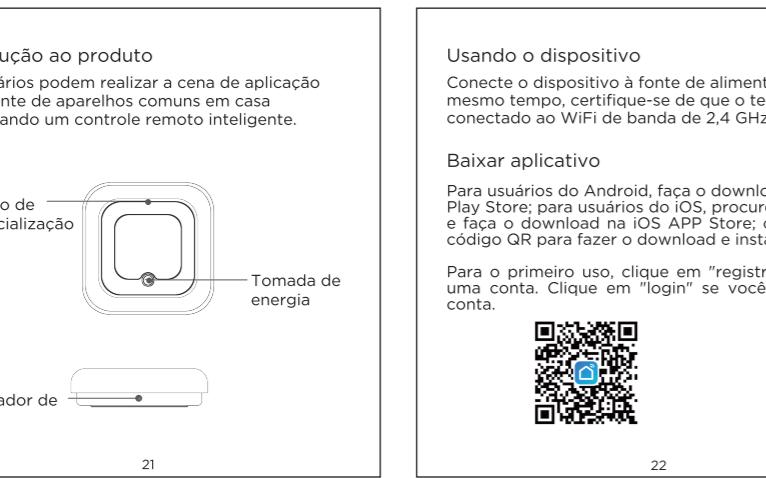

Introdução ao produto
Os usuários podem realizar a cena de aplicação inteligente de aparelhos comuns em casa adicionando um controle remoto inteligente.



21



Usando o dispositivo
Conecte o dispositivo à fonte de alimentação e, ao mesmo tempo, certifique-se de que o telefone esteja conectado ao WiFi de banda de 2,4 GHz.

Baixar aplicativo

Para usuários do Android, faça o download na Google Play Store; para usuários do iOS, procure o Smart Life e faça o download na iOS APP Store, ou escaneie o código QR para fazer o download e instalar o APP.

Para o primeiro uso, clique em "registrar" para criar uma conta. Clique em "login" se você já tiver uma conta.




22



Adicionar o dispositivo
Vá para a página inicial, toque em "+" no canto superior direito para adicionar seu dispositivo;

- Toque em "Gateway e outros" na lista de dispositivos e selecione "Universal Remote Control" para adicionar o dispositivo seguindo as instruções na aplicativo para adicionar o dispositivo;




Botão Redefinir rede

23




Reinicialização da rede (Modo EZ)

- Entre na página de conexão WiFi, digite a senha do WiFi e toque em "Next" (Avançar); Use o "EZ Mode" (Modo EZ) para configurar a rede;
- Certifique-se de que o indicador de rede esteja piscando rapidamente (com o intervalo de 0,5s);




Indicador de rede

24

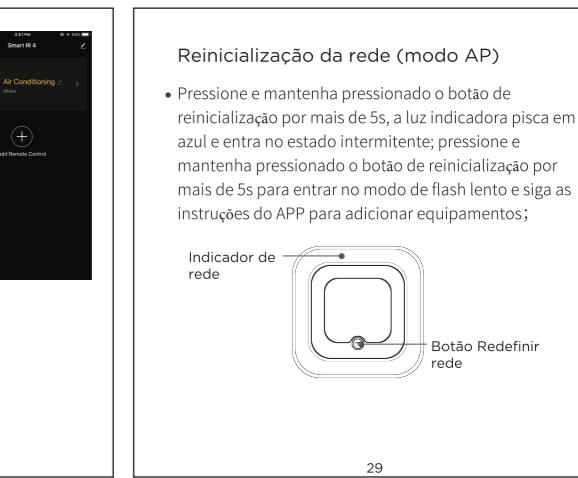


Reinicialização da rede (modo AP)

- Pressione e mantenha pressionado o botão de reinicialização por mais de 5s, a luz indicadora pisca em azul e entra no estado intermitente; pressione e mantenha pressionado o botão de reinicialização por mais de 5s para entrar no modo de flash lento e siga as instruções do APP para adicionar equipamentos;




Botão Redefinir rede


25

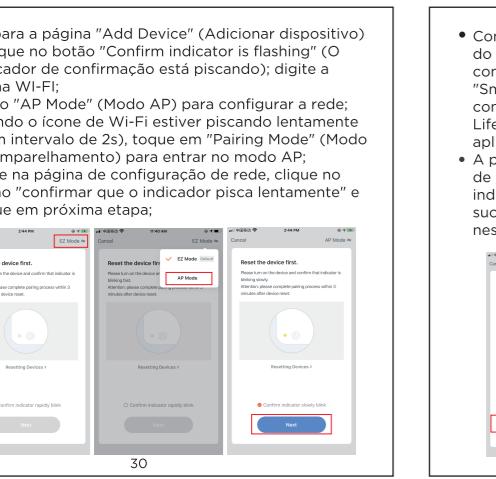


- Vá para a página "Add Device" (Adicionar dispositivo) e clique no botão "Confirm indicator is flashing" (O indicador de confirmação está piscando); digite a senha WiFi;
- Use o "AP Mode" (Modo AP) para configurar a rede; quando o ícone de WiFi estiver piscando lentamente (com intervalo de 2s), toque em "Pairing Mode" (Modo de emparelhamento) para entrar no modo AP;
- Entre na página de configuração de rede, clique no botão "confirmar que o indicador pisca lentamente" e clique em próxima etapa;

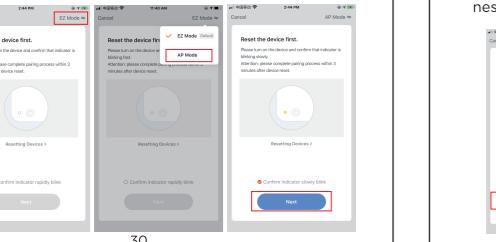


30

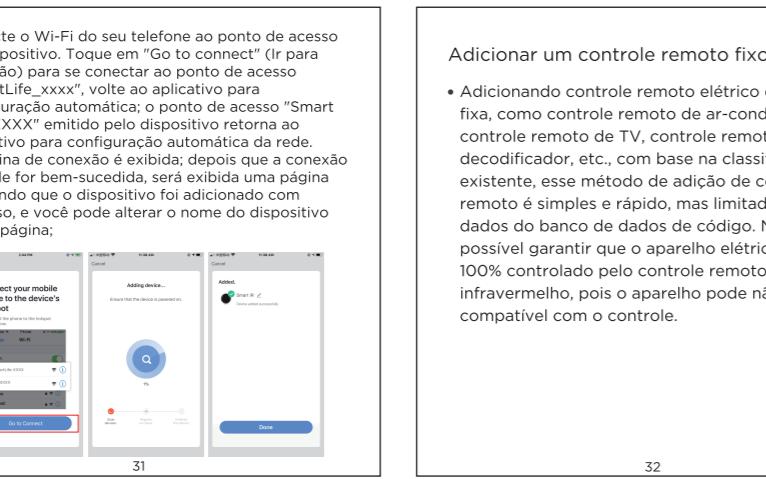

- Conecte o WiFi do seu telefone ao ponto de acesso do dispositivo. Toque em "Go to connect" (Ir para conexão) para se conectar ao ponto de acesso "SmartLife_xxxx", volte ao aplicativo para configuração automática; o ponto de acesso "SmartLife_xxxx" emitido pelo dispositivo retorna ao aplicativo para configuração automática da rede.
- A página de conexão é exibida; depois que a conexão de rede for bem-sucedida, será exibida uma página indicando que o dispositivo foi adicionado com sucesso, e você pode alterar o nome do dispositivo nessa página;

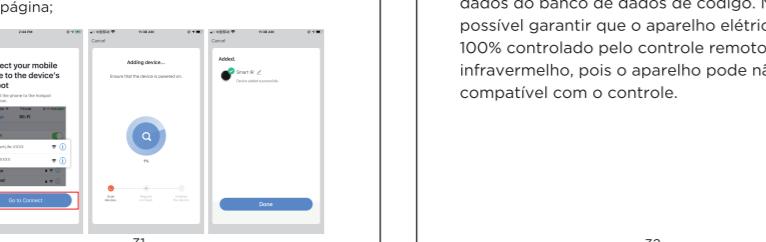

31

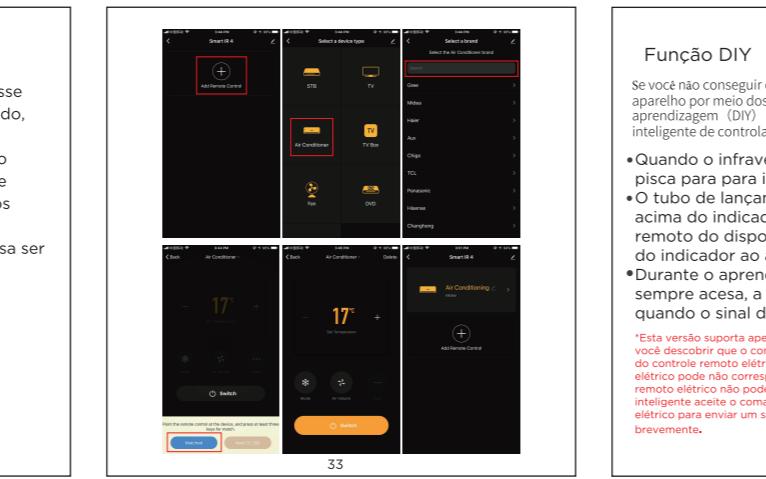


Adicionar um controle remoto fixo

- Adicionando controle remoto elétrico de classe fixa, como controle remoto de ar-condicionado, controle remoto de TV, controle remoto de decodificador, etc., com base na classificação existente, esse método de adição de controle remoto é simples e rápido, mas limitado pelos dados do banco de dados de código. Não é possível garantir que o aparelho elétrico possa ser 100% controlado pelo controle remoto por infravermelho, pois o aparelho pode não ser compatível com o controle.



32

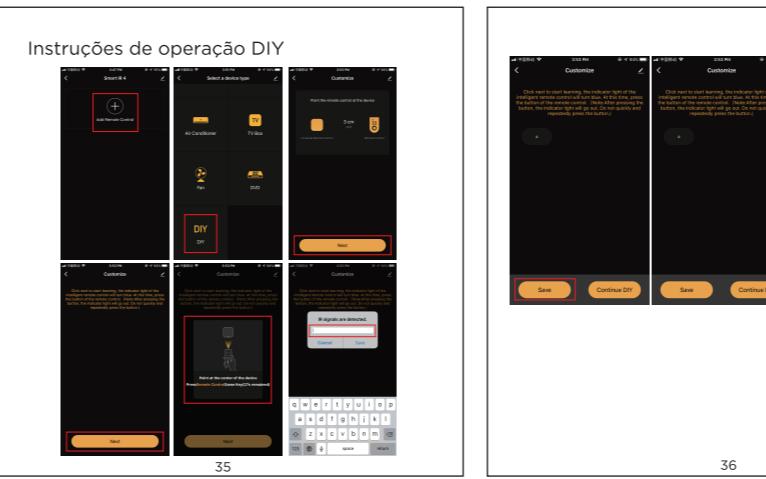


Função DIY

- Este produto destina-se apenas ao uso interno. Não o utilize em ambientes úmidos ou ao ar livre.
- Quando o infravermelho é emitido, a luz indicadora pisca para indicar a operação normal.
- O tubo de lançamento de infravermelho está na área acima do indicador luz indicadora. Aponte o controle remoto do dispositivo a 3 cm de distância para área do indicador ao aprender (DIY).
- Refer to the control platform configuration mode to enter the smart remote controller.
- Third-party control is currently supported (Continuous update).
- Mantenha-o longe de fontes de água e calor durante o uso para evitar danos aos produtos e possíveis riscos à segurança.



33

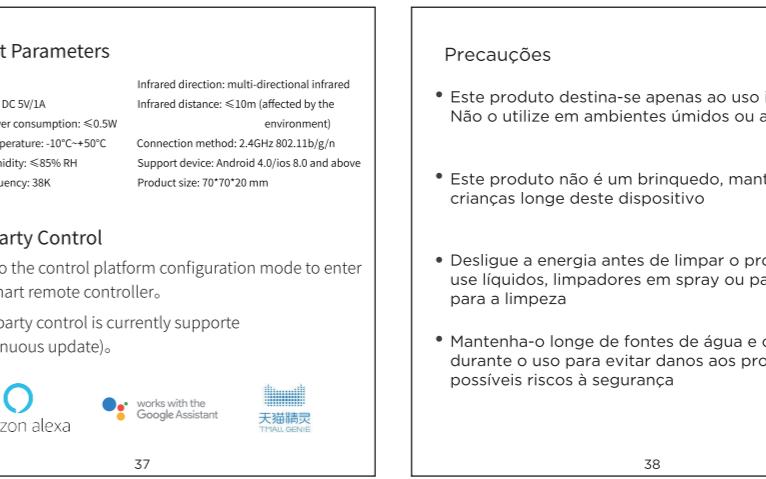


Product Parameters

Infrared direction: multi-directional infrared
Infrared distance: ≤10m (affected by the environment)
Standby power consumption: ≤0.5W
Working temperature: -10°C~+50°C
Working humidity: ≤85% RH
Infrared frequency: 38K

Connection method: 2.4GHz 802.11b/g/n
Support device: Android 4.0/ios 8.0 and above
Product size: 70*70*20 mm

Rev.1

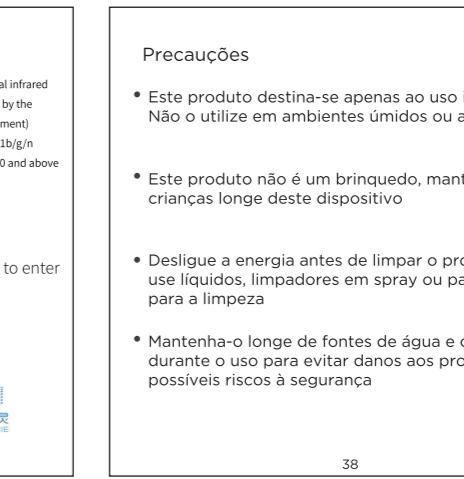

Precauções

- Este produto destina-se apenas ao uso interno. Não o utilize em ambientes úmidos ou ao ar livre.
- Quando o infravermelho é emitido, a luz indicadora pisca para indicar a operação normal.
- O tubo de lançamento de infravermelho está na área acima do indicador luz indicadora. Aponte o controle remoto do dispositivo a 3 cm de distância para área do indicador ao aprender (DIY).
- Desligue a energia antes de limpar o produto. Não use líquidos, limpadores em spray ou panos úmidos para a limpeza.
- Mantenha-o longe de fontes de água e calor durante o uso para evitar danos aos produtos e possíveis riscos à segurança.


34

35

36

37

38

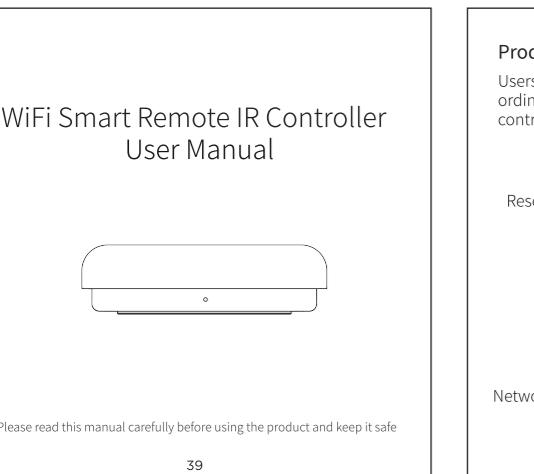


WiFi Smart Remote IR Controller User Manual




Please read this manual carefully before using the product and keep it safe

39

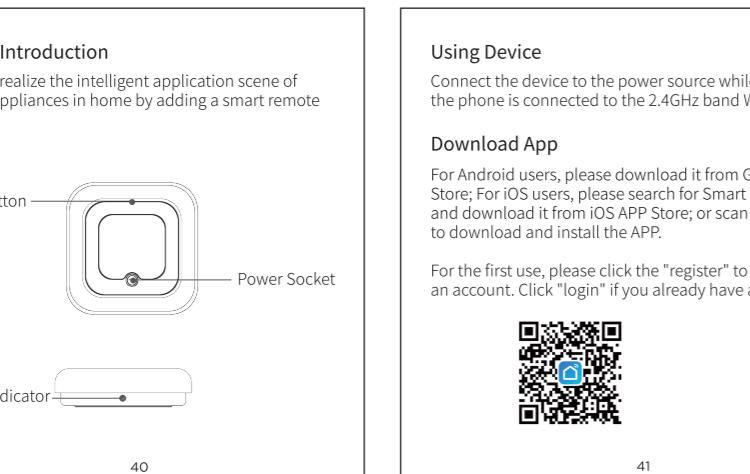


Product Introduction

Users can realize the intelligent application scene of ordinary appliances in home by adding a smart remote controller.

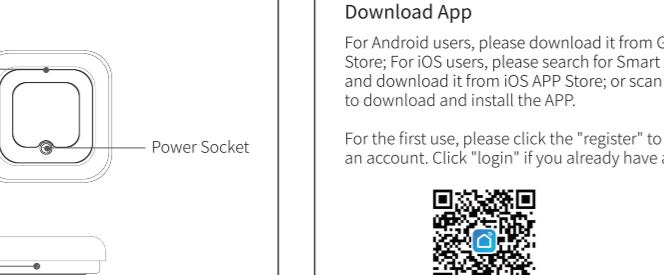

40

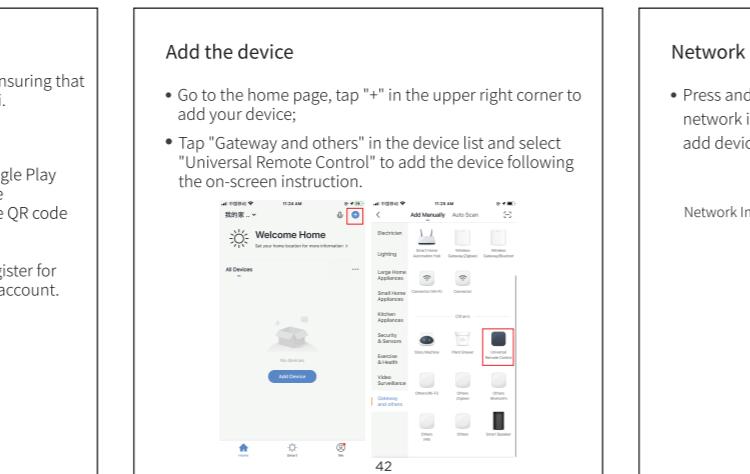

Using Device

Connect the device to the power source while ensuring that the phone is connected to the 2.4GHz band WiFi.


Download App

For Android users, please download it from Google Play Store; For iOS users, please search for Smart Life Store; For iOS users, please search for Smart Life and download it from iOS APP Store; or scan the QR code to download and install the APP.

For the first use, please click the "register" to register for an account. Click "login" if you already have an account.




41

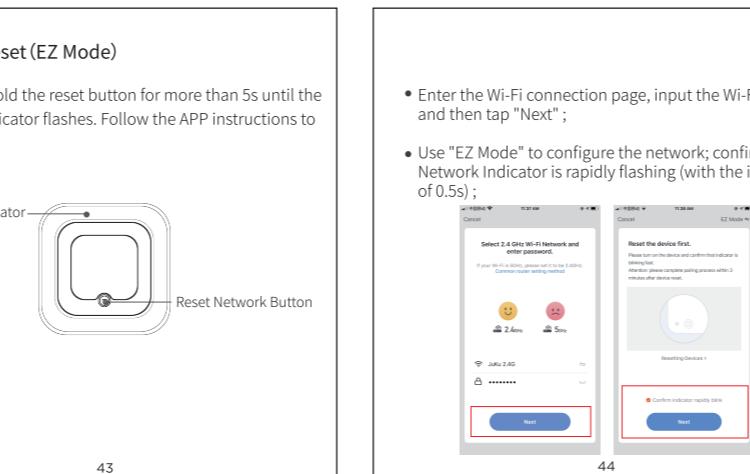


Add the device

- Go to the home page, tap "+" in the upper right corner to add your device;
- Tap "Gateway and others" in the device list and select "Universal Remote Control" to add the device following the on-screen instruction.

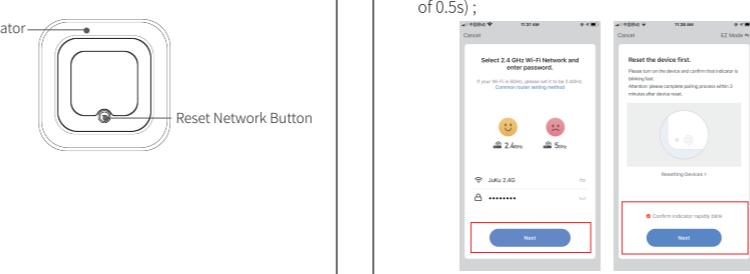

42

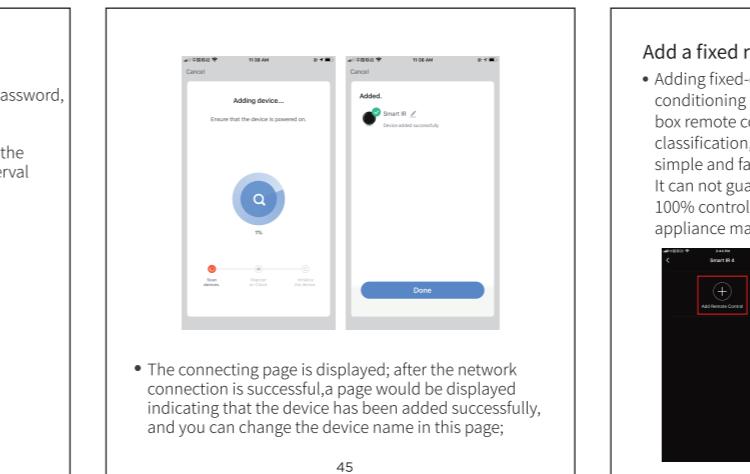


Network Reset (EZ Mode)

- Press and hold the reset button for more than 5s until the network indicator flashes. Follow the APP instructions to add device;
- Use "EZ Mode" to configure the network; confirm the Network Indicator is rapidly flashing (with the interval of 0.5s);




43

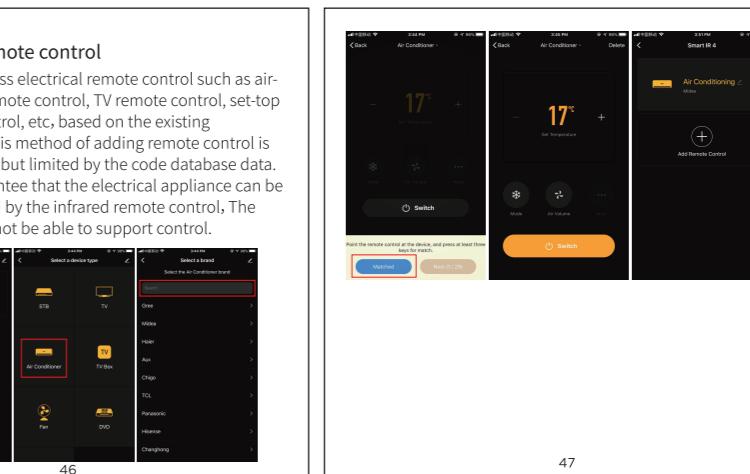


Network Reset (AP Mode)

- Enter the Wi-Fi connection page, input the Wi-Fi password, and then tap "Next";
- Use "EZ Mode" to configure the network; confirm the Network Indicator is rapidly flashing (with the interval of 0.5s);

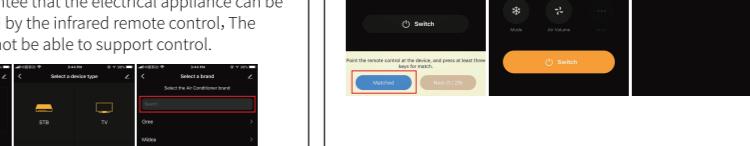


44

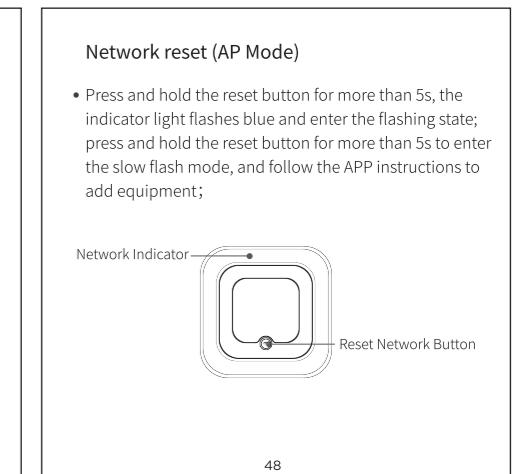


Network reset (AP Mode)


- Press and hold the reset button for more than 5s, the indicator light flashes blue and enter the flashing state; press and hold the reset button for more than 5s to enter the slow flash mode, and follow the APP instructions to add equipment;

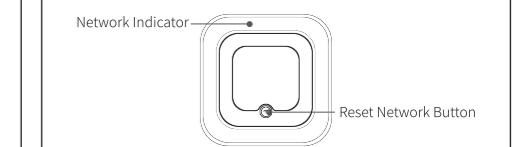


45

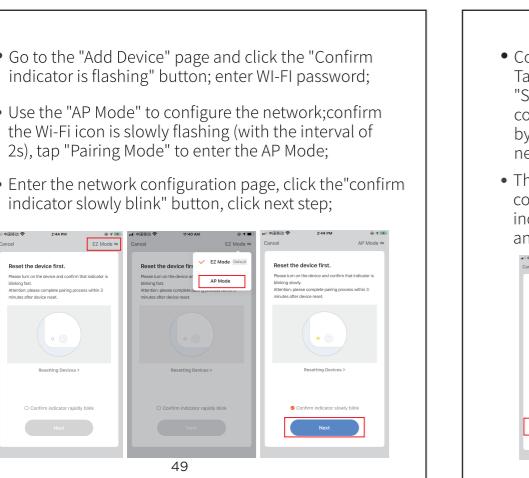


- Go to the "Add Device" page and click the "Confirm indicator is flashing" button; enter Wi-Fi password;
- Use the "AP Mode" to configure the network; confirm the Wi-Fi icon is slowly flashing (with the interval of 2s), tap "Pairing Mode" to enter the AP Mode;
- Enter the network configuration page, click the "confirm indicator slowly blink" button, click next step;

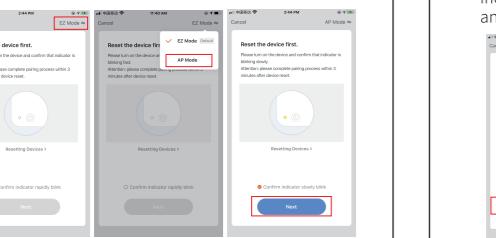


49

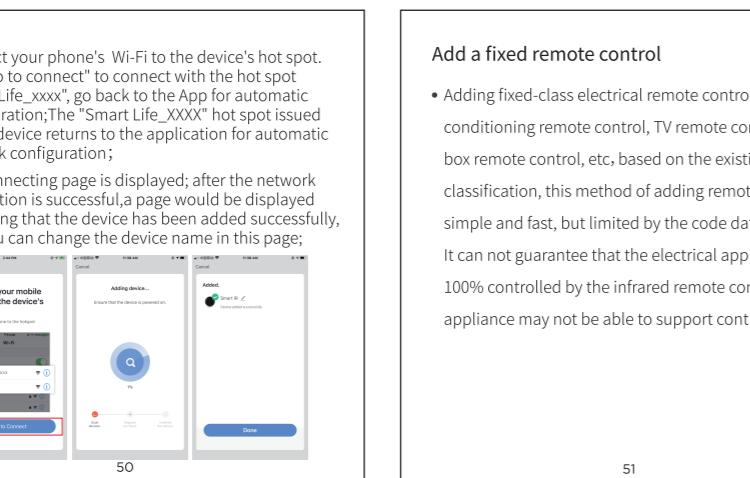

- Connect your phone's Wi-Fi to the device's hot spot. Tap "Go to connect" to connect with the hot spot "SmartLife_xxxx", go back to the App for automatic configuration; The "SmartLife_xxxx" hot spot issued by the device returns to the application for automatic network configuration;
- The connecting page is displayed; after the network connection is successful, a page would be displayed indicating that the device has been added successfully, and you can change the device name in this page;

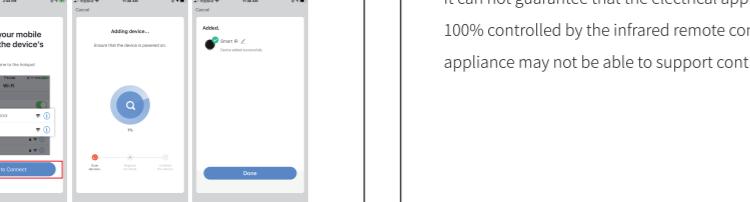


50

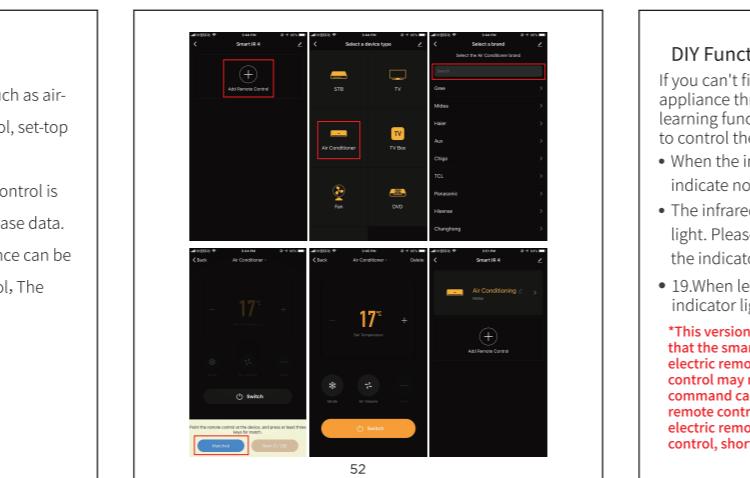

- Adding fixed-class electrical remote control such as air-conditioning remote control, TV remote control, set-top box remote control, etc, based on the existing classification, this method of adding remote control is simple and fast, but limited by the code database data. It can not guarantee that the electrical appliance can be 100% controlled by the infrared remote control, The appliance may not be able to support control.

It can not guarantee that the electrical appliance can be 100% controlled by the infrared remote control, The appliance may not be able to support control.


51

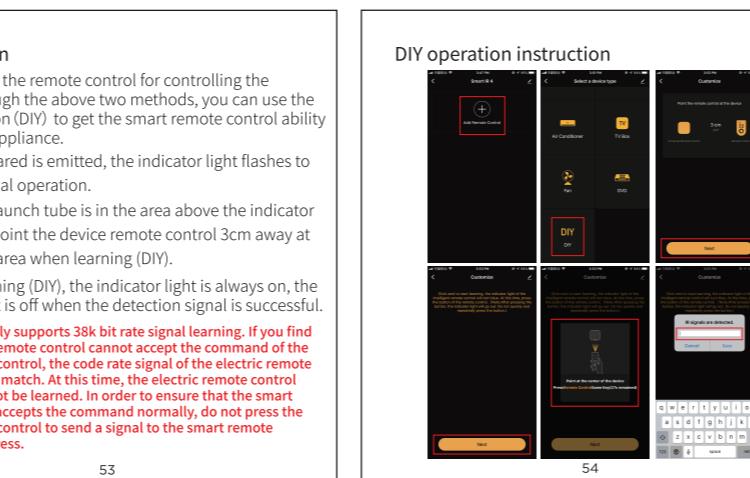

- Adding fixed-class electrical remote control such as air-conditioning remote control, TV remote control, set-top box remote control, etc, based on the existing classification, this method of adding remote control is simple and fast, but limited by the code database data. It can not guarantee that the electrical appliance can be 100% controlled by the infrared remote control, The appliance may not be able to support control.

It can not guarantee that the electrical appliance can be 100% controlled by the infrared remote control, The appliance may not be able to support control.

52

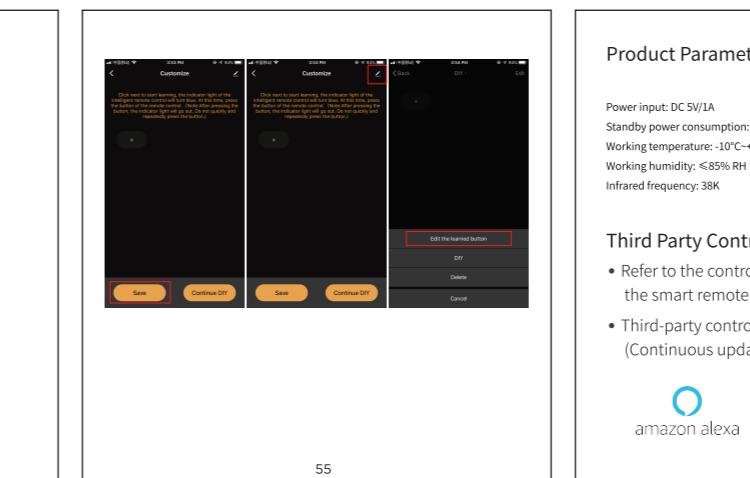

DIY Function

If you can't find the remote control for controlling the appliance through the above two methods, you can use the learning function (DIY) to get the smart remote control ability to control the appliance.

- When the infrared is emitted, the indicator light flashes to indicate normal operation.
- This product is not a toy, please keep children away from this device.


Third Party Control

- Refer to the control platform configuration mode to enter the smart remote controller.
- Turn off the power before cleaning the product. Do not use liquids, spray cleaners or wet cloths for cleaning.

*This version only supports 38k bit rate signal learning. If you find that the smart remote control cannot accept the command of the electric remote control, the code rate signal of the electric remote control may not match. At this time, the electric remote control command cannot be learned. In order to ensure that the smart remote control accepts the command normally, do not press the electric remote control to send a signal to the smart remote control, short press.



53

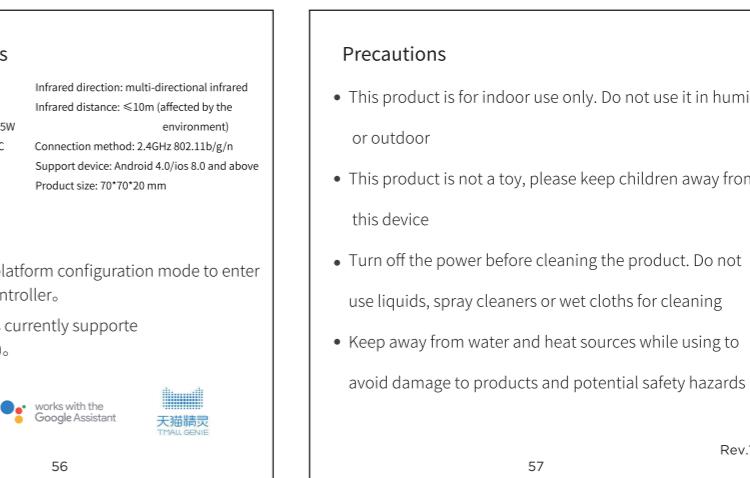

Product Parameters

Infrared direction: multi-directional infrared
Infrared distance: ≤10m (affected by the environment)
Standby power consumption: ≤0.5W
Working temperature: -10°C~+50°C
Working humidity: ≤85% RH
Infrared frequency: 38K

Precautions

- This product is for indoor use only. Do not use it in humid or outdoor
- When the infrared is emitted, the indicator light flashes to indicate normal operation.
- This product is not a toy, please keep children away from this device.
- The infrared launch tube is in the area above the indicator light. Please point the device remote control 3cm away at the indicator area when learning (DIY).
- Turn off the power before cleaning the product. Do not use liquids, spray cleaners or wet cloths for cleaning.
- Third-party control is currently supported (Continuous update).




works with the Google Assistant



Tmall精灵
TYML GENIE

Rev.1

54

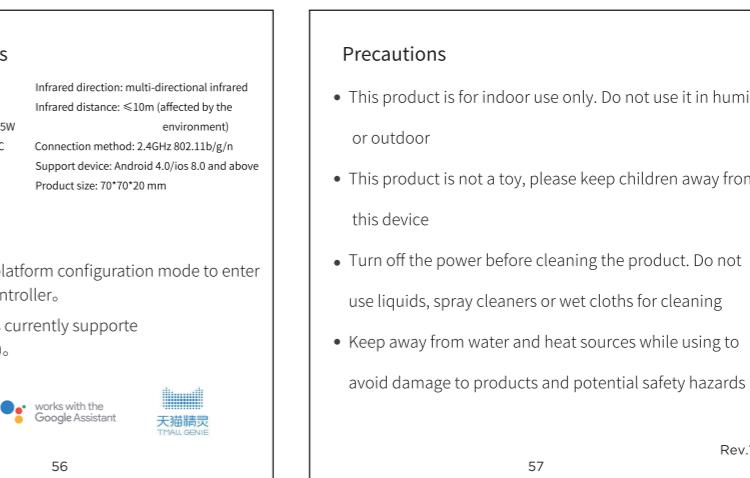

DIY operation instruction

Power input: DC 5V/1A

Standby power consumption: ≤0.5W

Working temperature: -10°C~+50°C

Working humidity: ≤85% RH

Infrared frequency: 38K

55



SERVI
TECH
SERVICIO TECNICO OFICIAL GADNIC
www.servitech.com.ar
11 6260 1114 (sólo texto)
servicetecnico@servitech.com.ar

56

57